


WICHTIG
BITTE UNBEDINGT BEACHTEN
IMPORTANT
PLEASE NOTE THE FOLLOWING

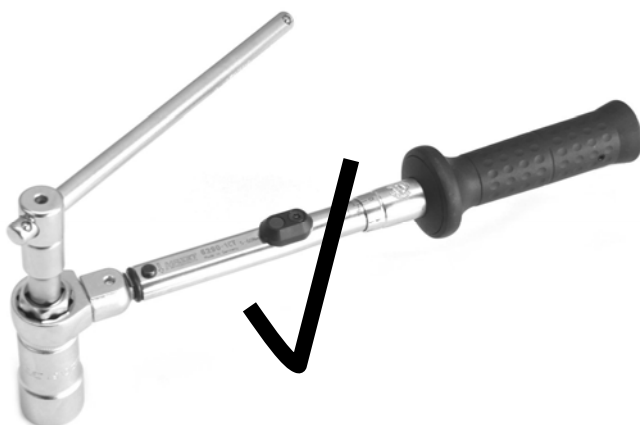

**Nur Dämpferwerkzeug verwenden -
Kein Schlagschrauber!**

**Only use special piston rod tools -
Do not use impact wrenches!**

Anzugsdrehmoment für Kolbenstangenverschraubung:

M8 = 25 Nm, M10x1 = 20 Nm, M10x1,25 = 20 Nm, M12x1,25 = 35 Nm,
M12x1,5 = 40 Nm, M14x1,5 = 50 Nm, M16x1,5 = 50 Nm

Tightening torque for the piston rod nut:

M8 = 25Nm (18 ft-lb), M10x1 = 20Nm (15 ft-lb), M10x1,25 = 20Nm (15 ft-lb),
M12x1,25 = 35Nm (26 ft-lb), M12x1,5 = 40Nm (29 ft-lb), M14x1,5 = 50Nm (37 ft-lb),
M16x1,5 = 50Nm (37 ft-lb)